




WINDOW & DOOR

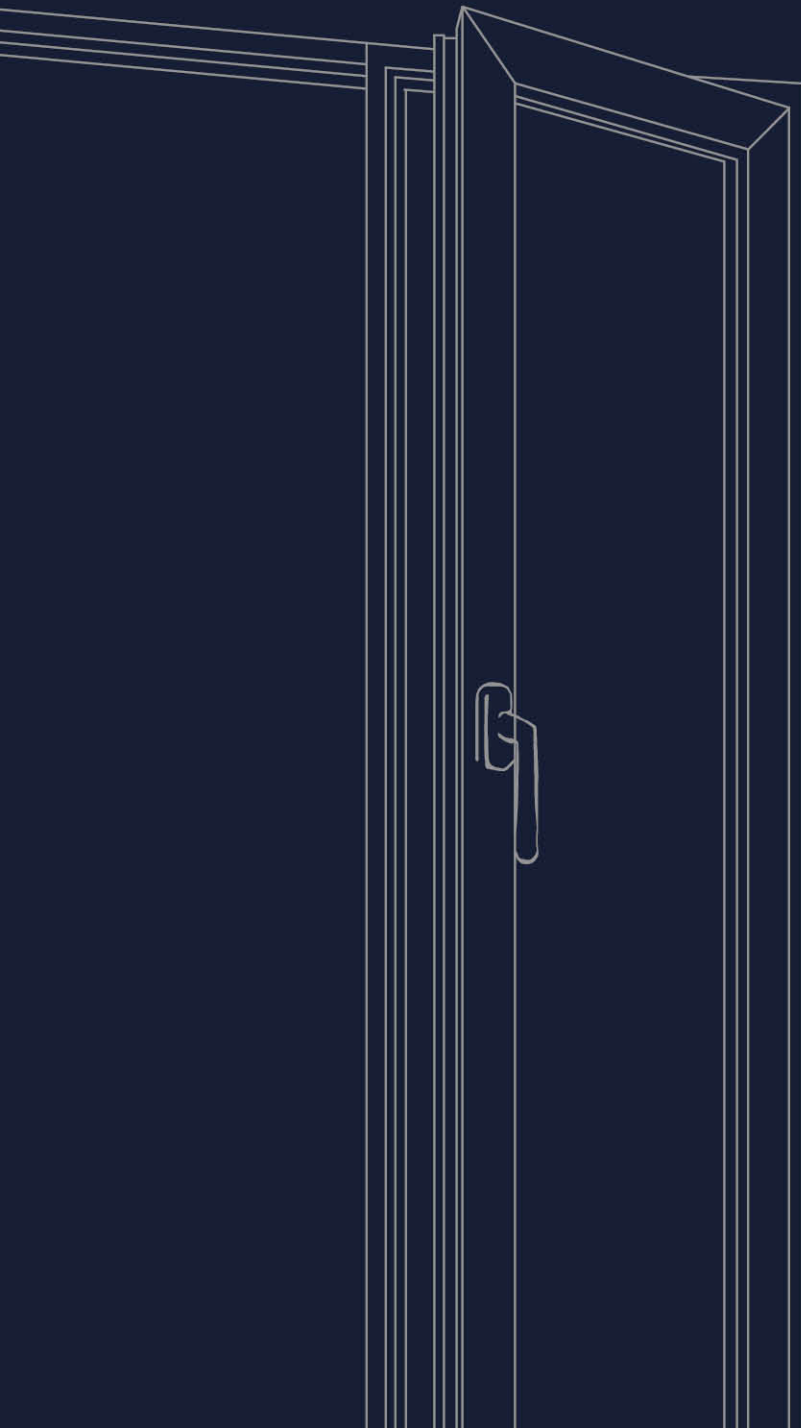

WINDOW&DOOR

FOCUS ON BIGHOUSE
DOORS AND WINDOWS

75 INNER OPENING AND INNER REVERSING SYSTEM WINDOW




PRODUCT PERFORMANCE

GLASS CONFIGURATION	 THERMAL INSULATION	 SOUND INSULATION	 WATERPROOF	 AIR TIGHTNESS	 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²·K)	36 (3 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5mm+22Ar+5Low-E	1.5(W/m²·K)	36 (3 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·K)	48 (5 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·K)	48 (5 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)


PRODUCT PARAMETERS

- Frame size: 75mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white (custom color)

OPTIONAL PRODUCTS

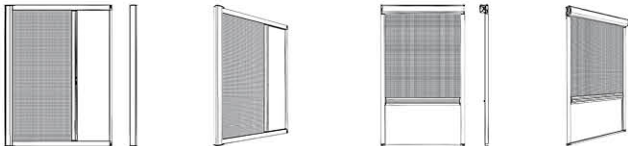

开启方式 OPENING METHOD



PRODUCT HARDWARE



AMERICAN STYLE 130 BRIDGE PANORAMIC SYSTEM WINDOW




PRODUCT PERFORMANCE

GLASS CONFIGURATION	 THERMAL INSULATION	 SOUND INSULATION	 WATERPROOF	 AIR TIGHTNESS	 WIND RESISTANT
5+9Ar+5+9Ar+5Low-E	1.2(W/m²·K)	48 (5 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5+9Ar+5+9Ar+5Low-E Double silver	1.0(W/m²·K)	48 (5 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)


PRODUCT PARAMETERS

- Frame size: 130mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white (custom color)

OPENING METHOD




External flat opening



External opening and downward suspension

OPTIONAL PRODUCTS

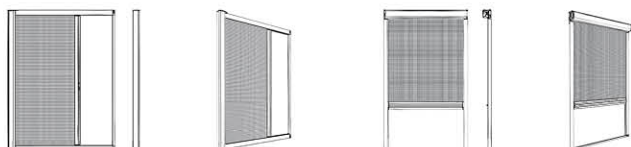

PRODUCT HARDWARE



75 SWING DOOR




产品性能 PRODUCT PERFORMANCE

GLASS CONFIGURATION	 THERMAL INSULATION	 SOUND INSULATION	 WATERPROOF	 AIR TIGHTNESS	 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²k)	36 (3 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5mm+22Ar+5Low-E	1.5(W/m²k)	36 (3 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	48 (5 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	48 (5 level)	700Pa	≤ 0.8 (8 level)	5.0 (9 level)


PRODUCT PARAMETERS

- Frame size: 75mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white (custom color)

OPTIONAL PRODUCTS

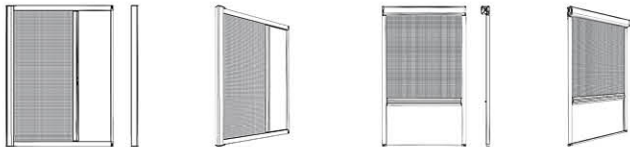

OPENING METHOD

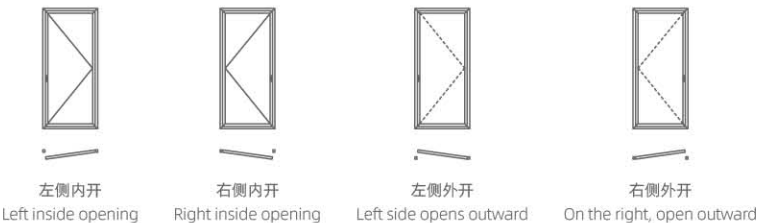

PRODUCT HARDWARE



133 INSULATED BRIDGE BREAK SLIDING DOOR




产品性能 PRODUCT PERFORMANCE

GLASS CONFIGURATION	 THERMAL INSULATION	 SOUND INSULATION	 WATERPROOF	 AIR TIGHTNESS	 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²·k)	35 (3 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)
5mm+22Ar+5Low-E	1.5(W/m²·k)	35 (3 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·k)	46 (5 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·k)	46 (5 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)

PRODUCT PARAMETERS

- Frame size: 133mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0-2.5mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white (custom color)


OPTIONAL PRODUCTS

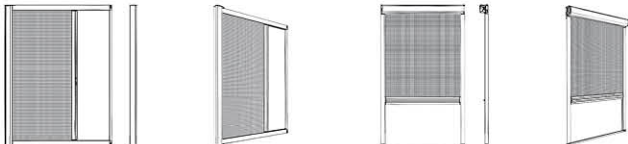

PRODUCT HARDWARE



OPENING METHOD

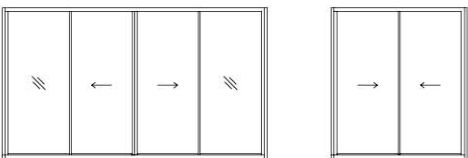

200 INSULATED BRIDGE SLIDING DOOR



PRODUCT PERFORMANCE

GLASS CONFIGURATION	 THERMAL INSULATION	 SOUND INSULATION	 WATERPROOF	 AIR TIGHTNESS	 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²k)	35 (3 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)
5mm+22Ar+5Low-E	1.5(W/m²k)	35 (3 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	46 (5 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	46 (5 level)	500Pa	≤ 5.8 (5 level)	3.8 (5 level)


PRODUCT PARAMETERS

- Frame size: 200mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white (custom color)


PRODUCT HARDWARE




OPTIONAL PRODUCTS

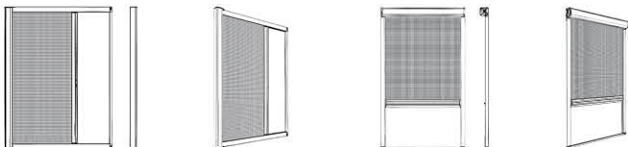

OPENING METHOD

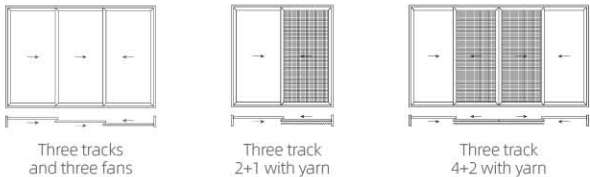


73 INSULATED BRIDGE FOLDING DOOR

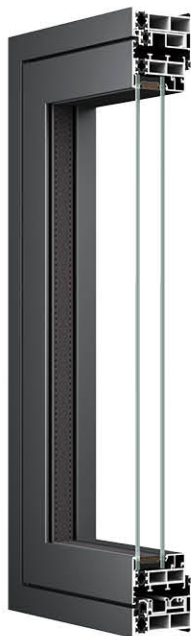

PRODUCT PARAMETERS

- Frame size: 73mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white (custom color)


OPTIONAL PRODUCTS

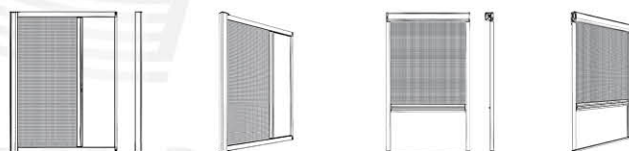

PRODUCT HARDWARE





OPENING METHOD

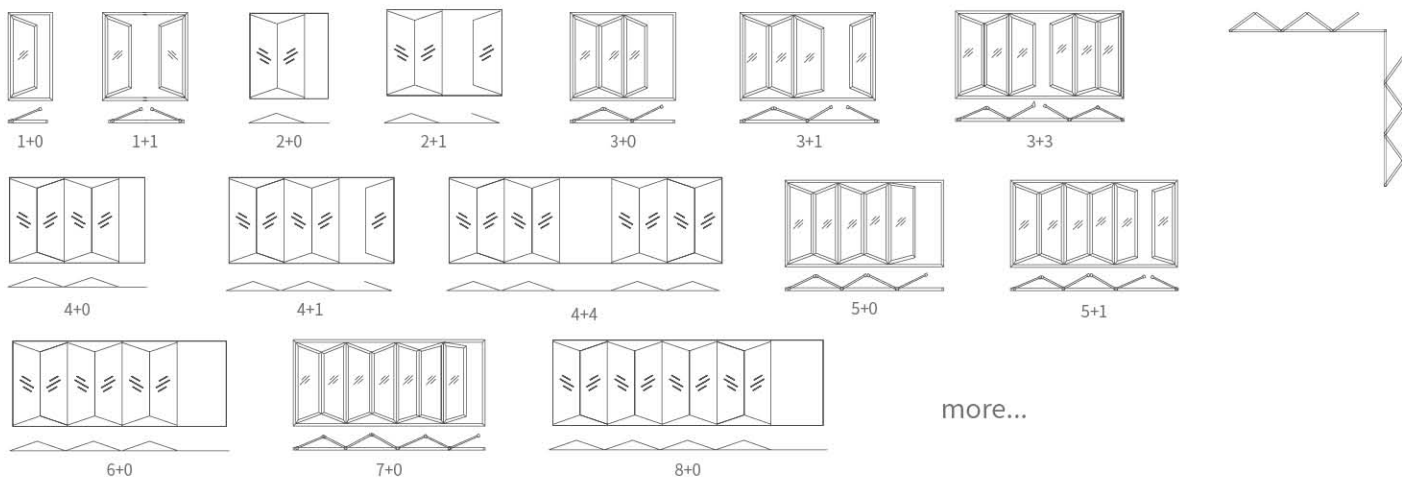

SERI PINTU MASUK




HANYA MENAMPILKAN BEBERAPA GAYA, DAPAT DISESUAIKAN

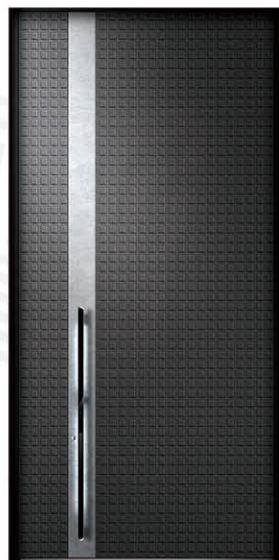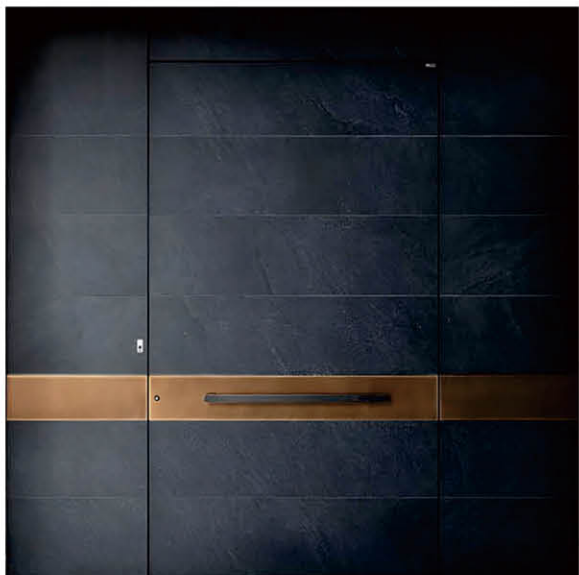

HANYA MENAMPILKAN BEBERAPA GAYA, DAPAT DISESUAIKAN







HANYA MENAMPILKAN BEBERAPA GAYA, DAPAT DISESUAIKAN

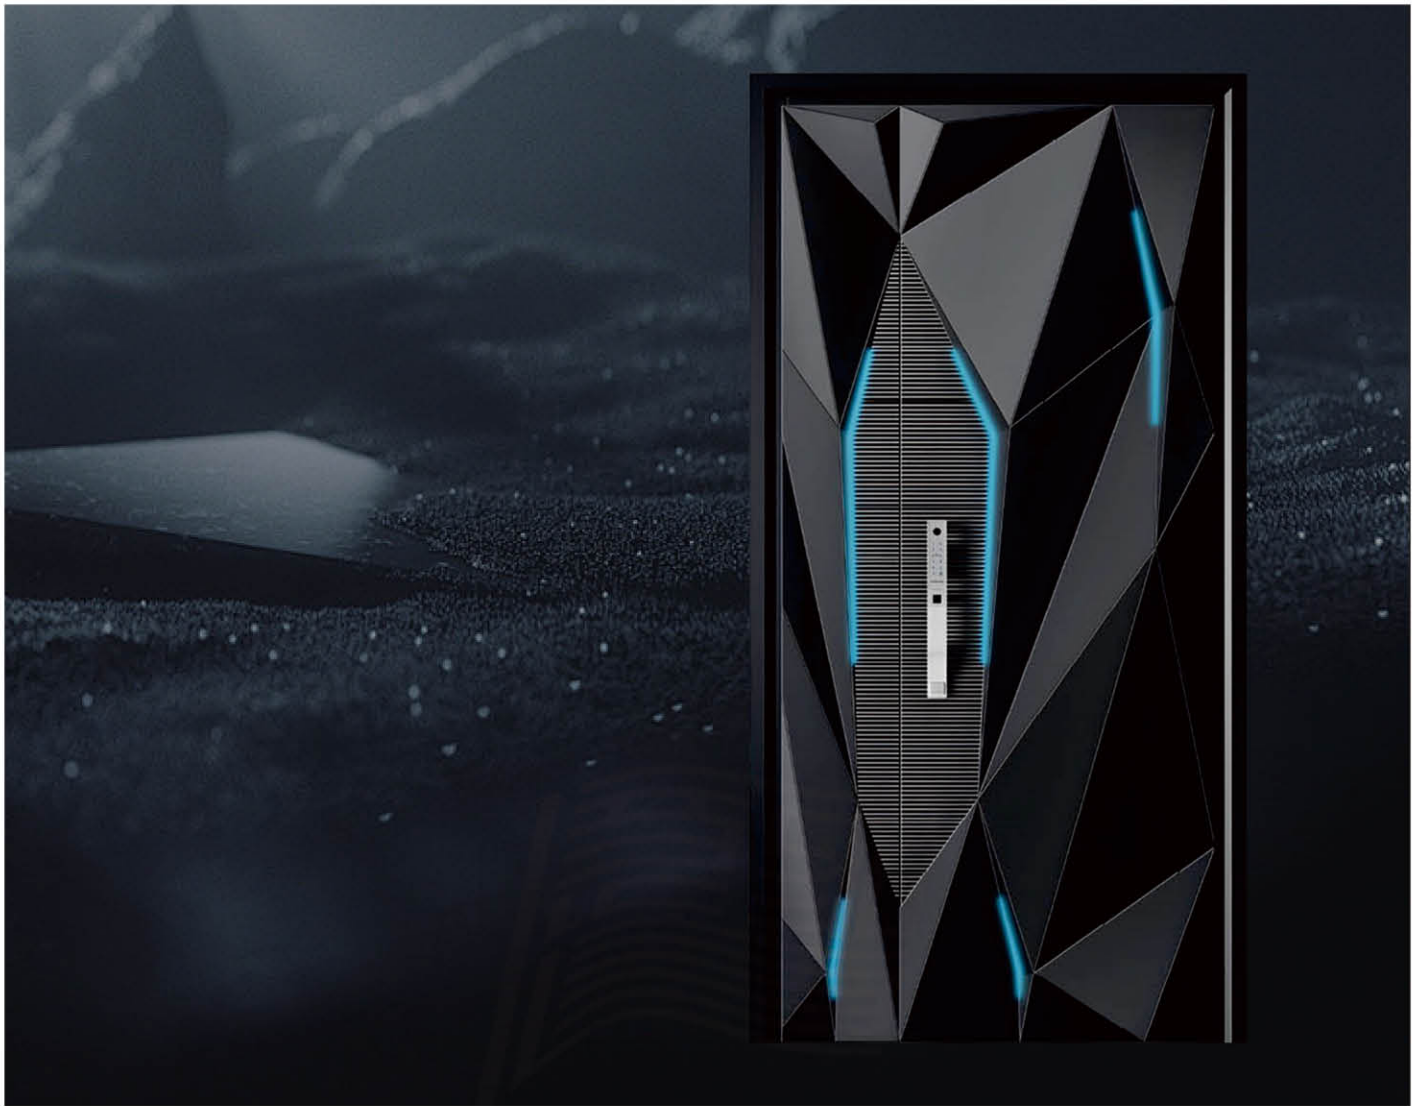


MAGINE ROAD



HANYA MENAMPILKAN BEBERAPA GAYA, DAPAT DISESUAIKAN

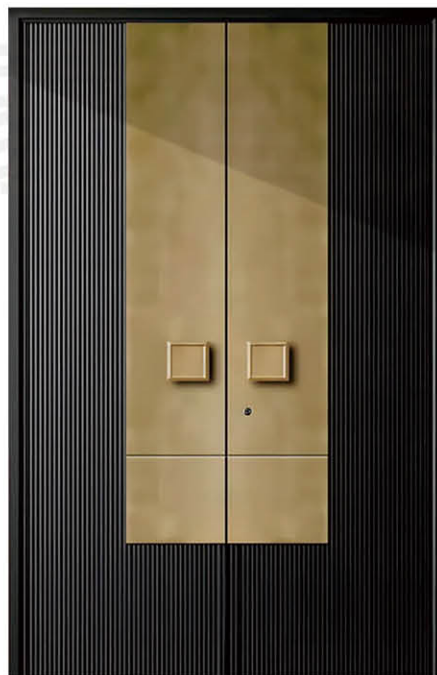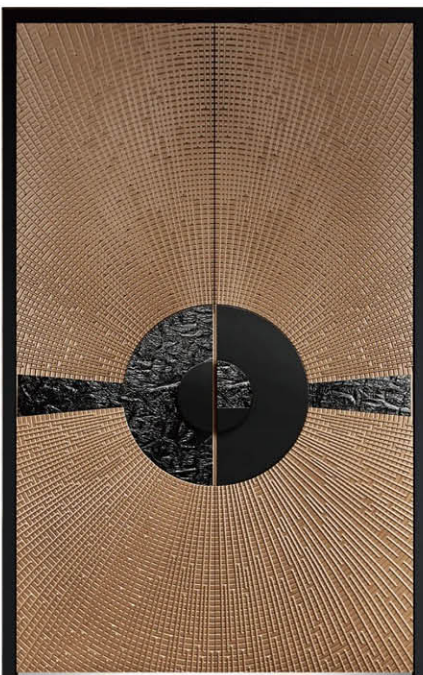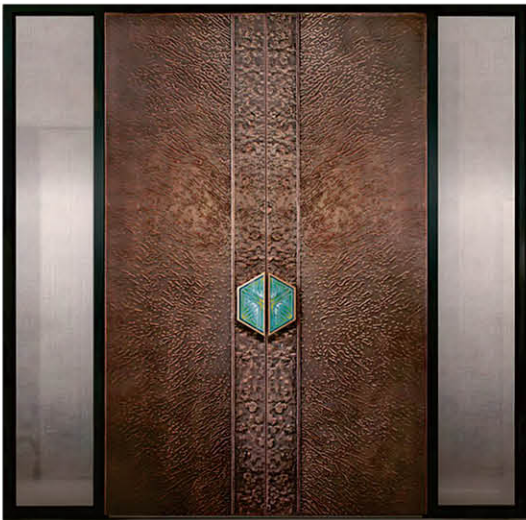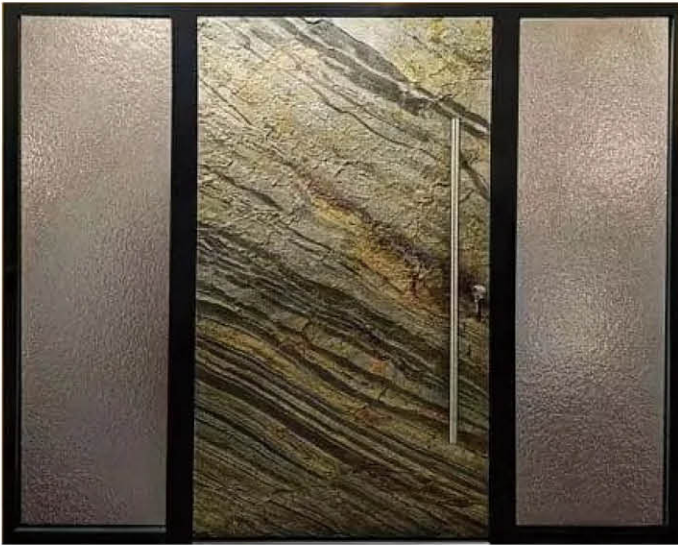

HANYA MENAMPILKAN BEBERAPA GAYA, DAPAT DISESUAIKAN

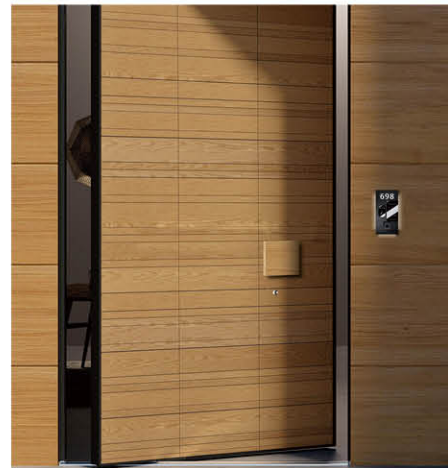

ZHIFENG 知峰

产品风格：现代
产品系列：知峰1000系列智能系统门
主要材质：钢化玻璃、钛合金、
内衬：高密度板、铝蜂窝

智能系列



HANYA MENAMPILKAN BEBERAPA GAYA, DAPAT DISESUAIKAN

BEBERAPA PERANGKAT KERAS OPSIONAL



WARNA PILIHAN



藏青红
PANTONE 19-0638 TCX



藏青蓝
PANTONE 19-0638 TCX



五号黑
PANTONE 262 TCX



银马金
PANTONE 4010 TCX




银灰
PANTONE 4010 TCX



北湖蓝
PANTONE 19-0638 TCX



藏青灰
PANTONE 19-0638 TCX



藏青灰
PANTONE 19-0638 TCX



银灰
PANTONE 4010 TCX



银灰
PANTONE 4010 TCX



科林木
PANTONE 19-0638 TCX



黑胡桃
PANTONE 19-0638 TCX



乌金木
PANTONE 19-0638 TCX



手磨橡木
PANTONE 19-0638 TCX



柚木
PANTONE 19-0638 TCX



橡木
PANTONE 19-0638 TCX



黑胡桃
PANTONE 19-0638 TCX




乌金木
PANTONE 19-0638 TCX



红橡木
PANTONE 19-0638 TCX



柚木
PANTONE 19-0638 TCX



白水晶
PANTONE 19-0638 TCX



大理石
PANTONE 19-0638 TCX



火山岩
PANTONE 19-0638 TCX



黑金
PANTONE 19-0638 TCX



石灰
PANTONE 19-0638 TCX



红金
PANTONE 19-0638 TCX



黑金
PANTONE 19-0638 TCX



红金
PANTONE 19-0638 TCX



黑金
PANTONE 19-0638 TCX



红金
PANTONE 19-0638 TCX

- ☎ And phone number: 6478067013
- ✉ Email: RM.WD@yahoo.com
- 📍 Address : 190 Britannia Rd E Mississauga unit 9